

INSTRUCTIONS PNEUMATIC HAMMER & CHISELS

for locking and unlocking Briq dowels

TRINERIN


SCOPE OF DELIVERY

You will receive the following tools:

- Pneumatic hammer
- Attachment sleeve
- Small chisel (for locking)
- Long chisel (for unlocking)
- Spring
- Spare rubber ring

+ INCL. SPARE PARTS

- 1x spare rubber ring
- 1x spare spring

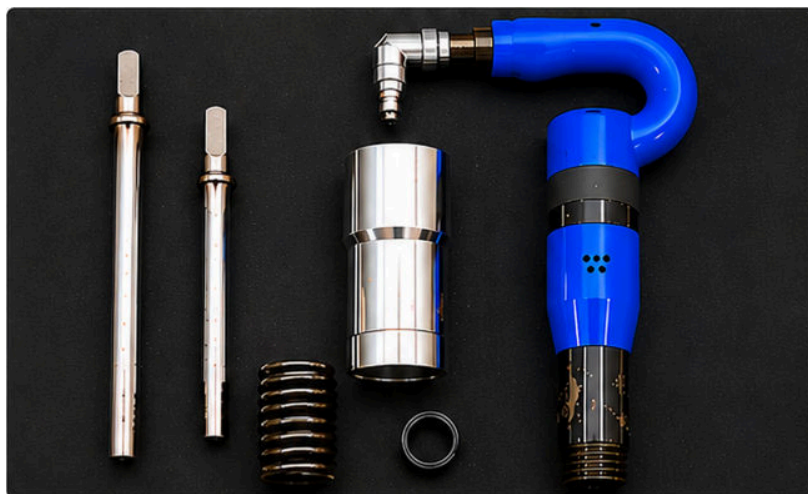


1 FIT THE RUBBER RING ONTO THE SMALL CHISEL

Slide the rubber ring onto the small chisel.



2 INSERT THE CHISEL INTO THE PNEUMATIC HAMMER


Insert the small chisel into the pneumatic hammer from the front until it is seated securely.

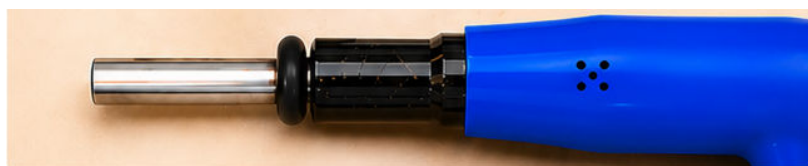

3 MOUNT THE SPRING

Screw the spring onto the chisel up to the stop.

Caution: Do not overtighten!

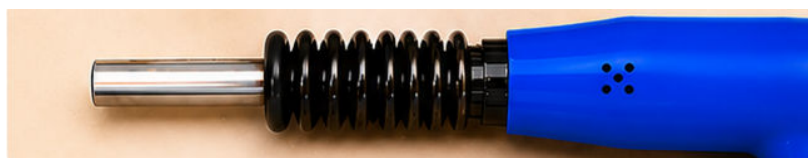


4 FIT THE ATTACHMENT SLEEVE – START WORK

Fit the attachment sleeve supplied onto the hammer.

The chisel must be correctly guided inside the sleeve and must not protrude.

The tool is now ready for use for locking the Briqs.

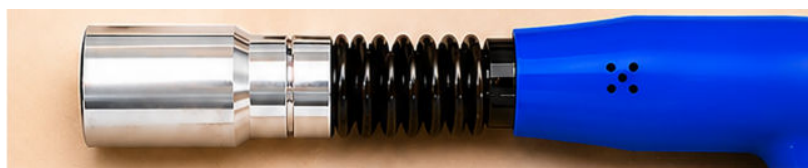

USING THE CHISELS

SMALL CHISEL (WITH SLEEVE + RUBBER RING)

For locking the Briq dowels.



- ✓ **Correct:** The chisel sits completely inside the attachment sleeve and is not visible from the outside.


LONG CHISEL (WITHOUT SLEEVE)

For unlocking the Briq dowels.



- ✓ **Correct:** The chisel is correctly guided in the hammer and securely fastened.

Caution!
The rubber plug must be inserted into the attachment sleeve.



SUPPORT & SPARE PARTS

If you encounter difficulties during assembly or use, or if a part does not fit, please contact us directly:

Mr Ljimini
☎ **+49 151 73022019**

We are happy to help you with:

- Questions about use
- Spare parts
- Technical problems



SAFETY NOTICE: Wear suitable protective equipment when using the tool (safety goggles, gloves, hearing protection). Keep the tool out of the reach of children.